

SOD-523 Plastic-Encapsulate Diodes

1SS400


High Speed Switching Diode

SOD-523



Features

- Small surface mounting type
- High speed
- High reliability with high surge current handling capability



MARKING:A



The marking bar indicates the cathode







Absolute Maximum Ratings at Ta=25 °C

PARAMETER	SYMBOLS	1SS400	UNITS
Non-repetitive peak reverse voltage	V_{RM}	90	V
DC Blocking Voltage	V_R	80	V
Forward Continuous Current	I_{FM}	225	mA
Average Rectified Output Current	I_o	100	mA
Non-Repetitive Peak Forward Surge Current @t=8.3ms	I_{FSM}	2.0	A
Power Dissipation	P_D	150	mW
Thermal Resistance Junction to Ambient	R_{JA}	833	°C/W
Operation Junction and Storage Temperature Range	T_J, T_{STG}	-55 to +150	°C

Characteristics at Ta= 25 °C


Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Forward voltage	V_F			1.2	V	$I_F=100mA$
Reverse current	I_R			0.1	μA	$V_R=80V$
Capacitance between terminals	C_T			3.0	pF	$V_R=0.5V, f=1MHz$
Reverse recovery time	t_{rr}			4	ns	$V_R=6V, I_F=10mA, R_L=100 \Omega$

Typical Characteristics

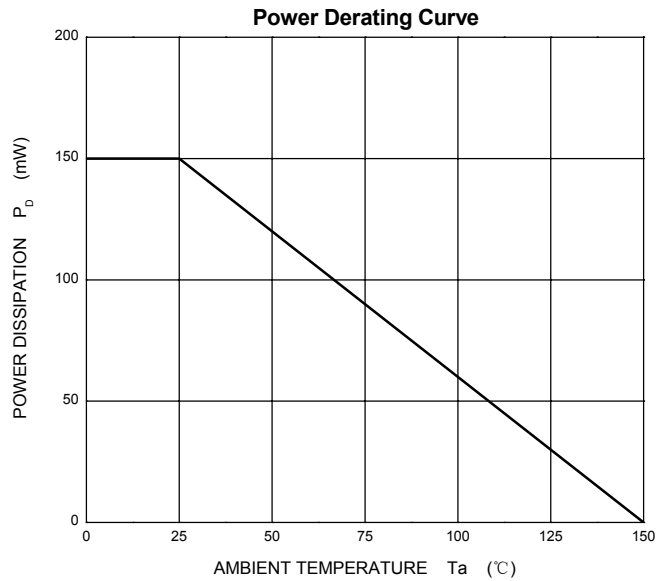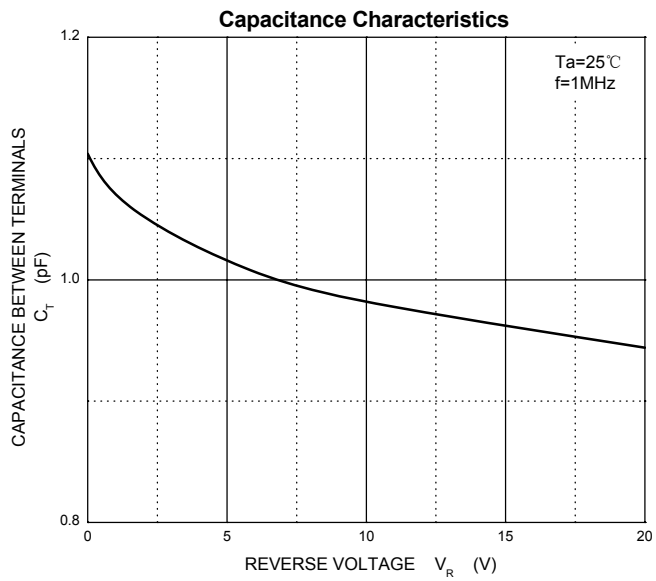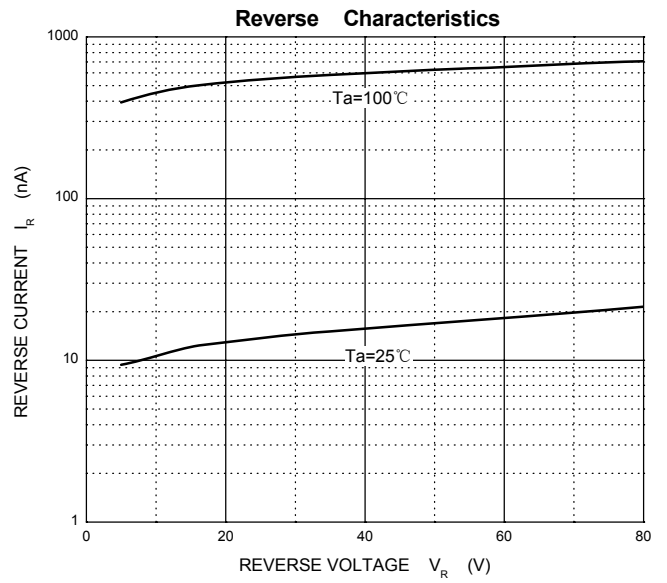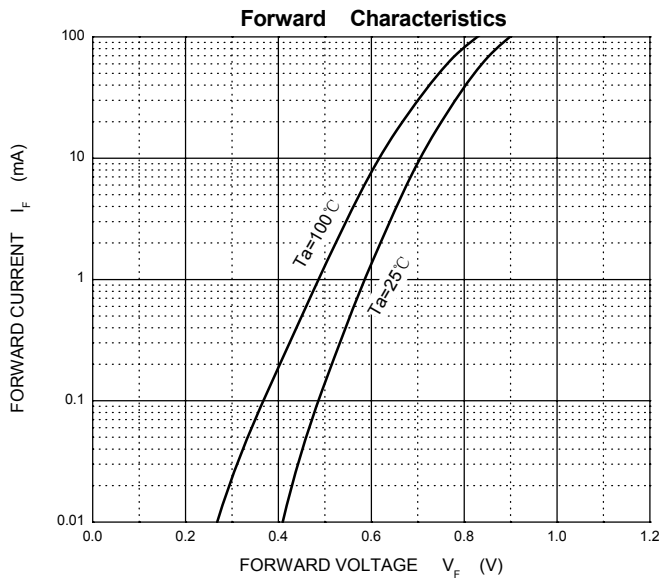


Outline Drawing

SOD-523 Package Outline Dimensions

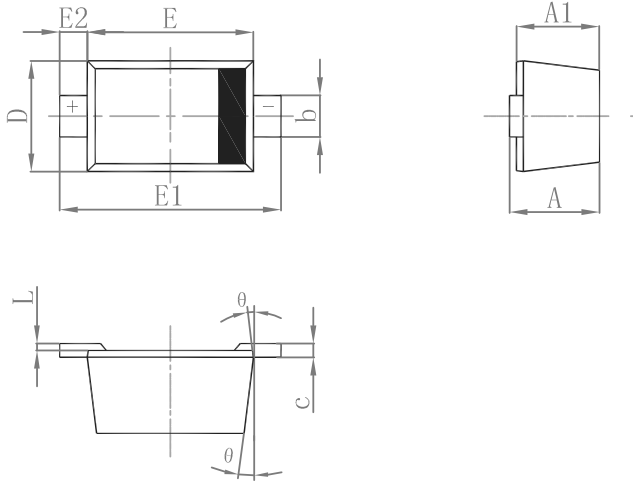

Sym ol	imensions In Millimeters		imensions In Inches	
	Min	Max	Min	Max
A	0.510	0.770	0.020	0.031
A1	0.500	0.770	0.020	0.031
b	0.250	0.400	0.010	0.016
c	0.080	0.150	0.003	0.006
D	0.750	1.000	0.030	0.040
E	1.100	1.300	0.043	0.051
E1	1.500	1.700	0.059	0.067
E2	0.150	0.250	0.006	0.010
L	0.000	0.070	0.000	0.003
K	0°	8°	0°	8°

Suggested Pad Layout

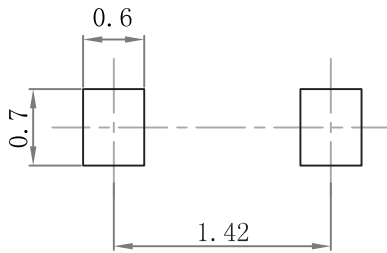

Note:

1. Controlling dimension: in/millimeters.
2. General tolerance: ±0.05mm.
3. The pad layout is for reference purposes only.

PACKAGE SPECIFICATIONS

Package	Reel Size	Reel DIA. (mm)	Q'TY/Reel (pcs)	Box Size (mm)	QTY/Box (pcs)	Carton Size (mm)	Q'TY/Carton (pcs)
SOD-523	7'	178	3000	183×188×80	45,000	386×265×215	180,000